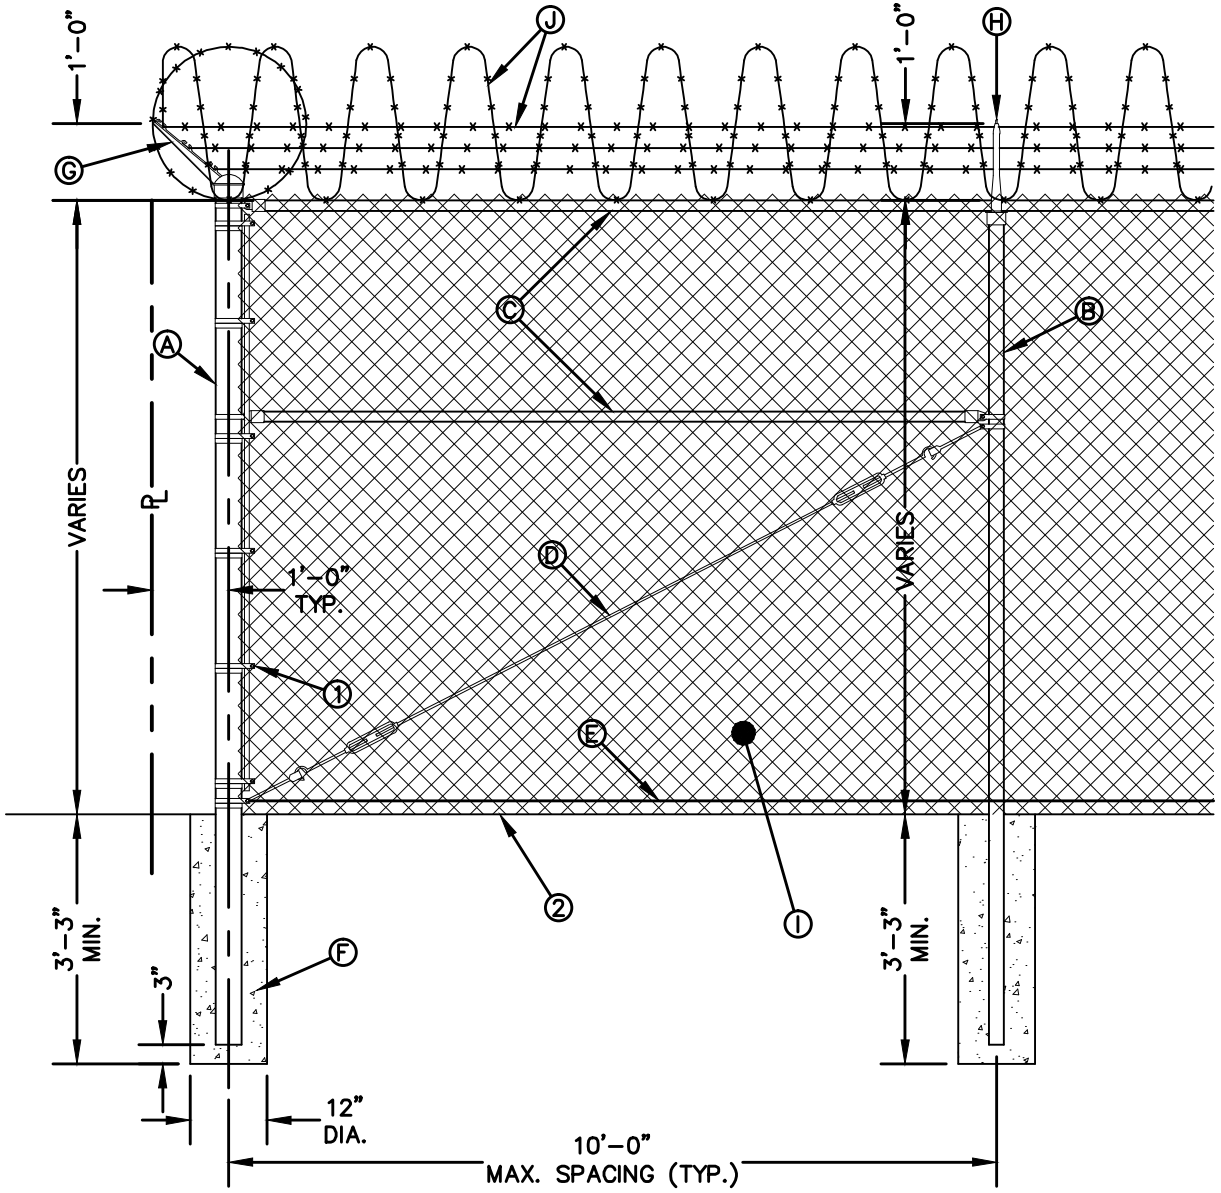

GENERAL NOTES:

1. WELD TOGETHER ALL ASSEMBLY BOLTS TO TENSION BANDS AND TENSION BANDS TO POSTS TO PREVENT DISASSEMBLY.
2. CHAIN–LINK FABRIC BOTTOM FLUSH WITH EXISTING OR FINAL GRADE.

CONSTRUCTION KEY NOTES:

A. 4"O.D. PIPE (9.11 LB./FT.)
B. 2⅜" O.D. PIPE (3.65 LB./FT.)
C. 1⅝" O.D. PIPE (2.27 LB./FT.)
D. ⅜" DIA. TRUSS ROD WITH TRUSS TIGHTENER (TYP.)
E. 7 GA. COILED SPRING TENSION WIRE
F. 2500 PSI CONCRETE
G. CORNER POST BARBED WIRE ARM (45°)
H. LINE POST BARBED WIRE ARM (45°)
I. 9 GA. GALVANIZED 2" CHAIN–LINK FABRIC
J. BARBED TAPE, 24" COIL WITH 3 ROWS OF 3 STRAND BARBED WIRE

STANDARD DETAIL	DATE: 4/1995 REV: 11/11/2009	CHAIN–LINK FENCE (STORMWATER) END POST AND CORNER POST	N.T.S.	el paso WATER	DETAIL No. 990–1