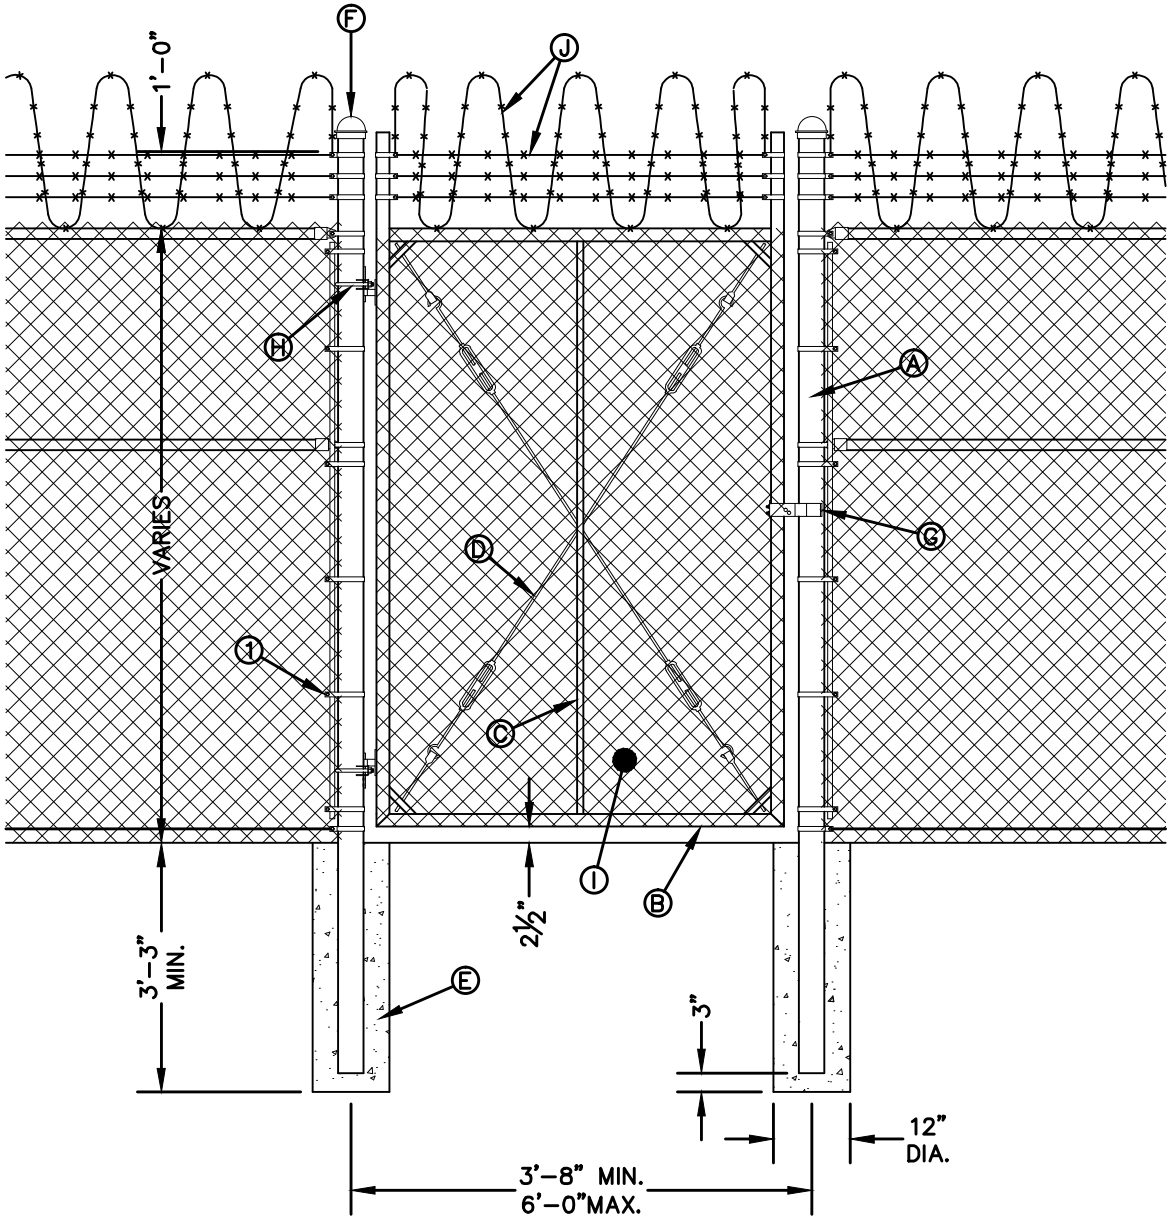

GENERAL NOTES:

1. WELD TOGETHER ALL ASSEMBLY BOLTS TO TENSION BANDS AND TENSION BANDS TO POSTS TO PREVENT DISASSEMBLY.

CONSTRUCTION KEY NOTES:

A. 4"O.D. PIPE (9.11 LB./FT.)
B. 2" SQ. STEEL TUBE GATE FRAME WELDED AT ALL JOINTS TO MAKE A SOLID FRAME
C. 1" SQ. STEEL TUBE BRACE (TYP.)
D. ⅜" DIA. TRUSS ROD WITH TRUSS TIGHTENER (TYP.)
E. 2500 PSI CONCRETE
F. POST CAP (TYP.)
G. FULCRUM LATCH
H. HINGE ASSEMBLY, BOLTS WELDED TO PREVENT DISASSEMBLY
I. 9 GA. GALVANIZED 2" CHAIN-LINK FABRIC STRETCHED & WELDED ON TO DOOR FRAME
J. BARBED TAPE, 24" COIL WITH 3 ROWS OF 3 STRAND BARBED WIRE

STANDARD DETAIL	DATE: 4/1995 REV: 11/11/2009	CHAIN-LINK FENCE (STORMWATER) PEDESTRIAN GATE N.T.S.	el paso WATER	DETAIL No. 990-4