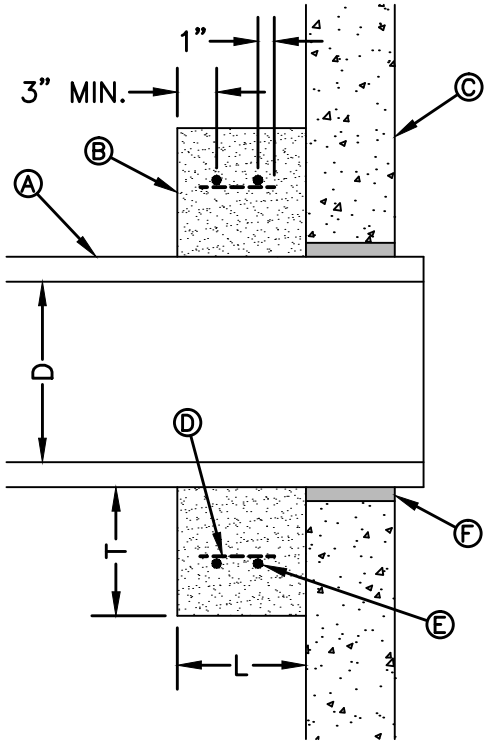

CONNECTION AT DROP INLET

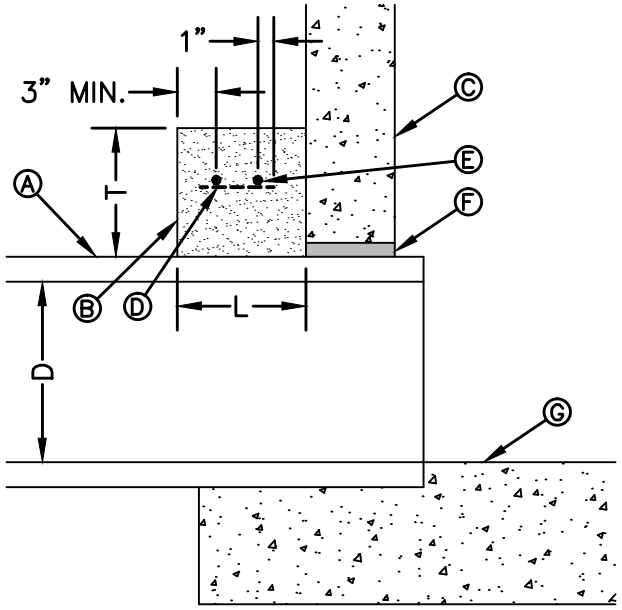

CONNECTION AT BASE

GENERAL NOTES:

1. NOT TO BE USED UNDER GROUND WATER CONDITIONS.

CONSTRUCTION KEY NOTES:

A. PROPOSED R.C.P. PIPE.
B. CONCRETE COLLAR (3000 PSI CONCRETE).
C. INSIDE WALL OF EXISTING MANHOLE OR PRECAST STRUCTURE.
D. #4's @ 12" O.C.
E. 2–#4 CIRCULAR TIES.
F. NON–SHRINK GROUT TO BE PLACED BETWEEN EXISTING MANHOLE AND RCP TO COVER ALL GAPS (TYPICAL). THE AREA BETWEEN THE EXISTING MANHOLE/STRUCTURE AND THE RCP SHALL BE 1/2 OF THE WALL THICKNESS OF THE EXISTING STRUCTURE.
G. MANHOLE BASE.

TABLE		
D	L	T
12"	12"	12"
18"	12"	12"
24"	12"	12"
30"	12"	12"
36"	18"	18"
42"	18"	18"

STANDARD DETAIL	DATE: 9/8/2009 REV:	PIPE CONNECTION TO STORMWATER MANHOLE CONCRETE COLLAR	N.T.S.	el paso WATER	DETAIL No. 926–2