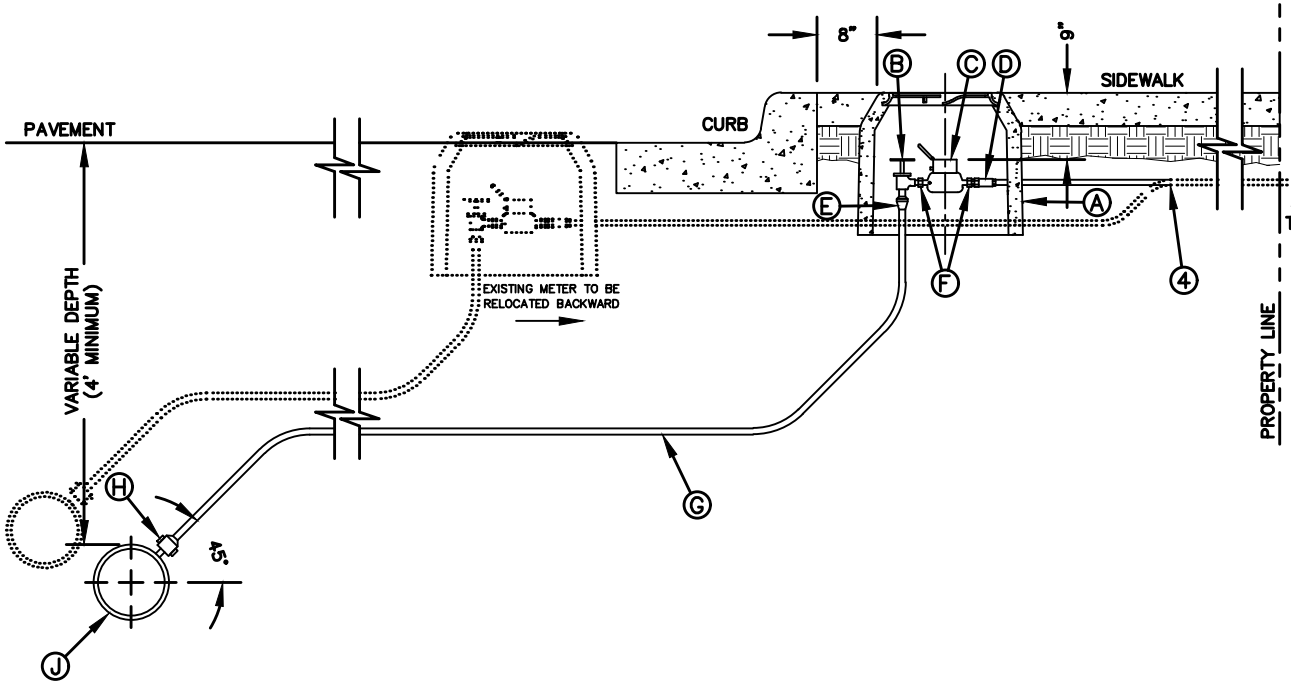

GENERAL NOTES:

1. DETAIL SHOWN FOR A 3/4" SERVICE, 1" SERVICE INSTALLATION IS SIMILAR EXCEPT FOR SIZES OF PIPE, FITTING, METER AND BOX (TYPE "B").
2. ABANDON EXISTING SERVICE LINES IN PLACE.
3. NO SPLICING SHALL BE ALLOWED. FULL LENGTH OF PIPING SERVICE SHALL BE INSTALLED.
4. CONTRACTOR SHALL MAKE VERTICAL AND HORIZONTAL ADJUSTMENTS AND FURNISH ALL FITTINGS, PIPING AND VALVES AS NECESSARY ON THE CUSTOMER SERVICE SIDE TO MAKE A SERVICE CONNECTION.

CONSTRUCTION KEY NOTES:

A. METER BOX TYPE "A" (SEE DETAILS 291 & 292) SHALL BE SET SLIGHTLY HIGHER THAN SURROUNDING GROUND OR AT CURB LEVEL.
B. 3/4" BALL ANGLE SERVICE VALVE WITH PADLOCK WINGS.
C. WATER METER (CENTER INSIDE METER BOX).
D. WHEN REQUIRED BY EPWU, A DUAL CHECK BACKFLOW PREVENTER SHALL BE INSTALLED ON THE OUTLET SIDE OF THE METER.
E. END FLARE OF SERVICE LINE.
F. INLET AND OUTLET COUPLING.
G. 3/4" COPPER SERVICE LINE (SEE NOTE 3).
H. 5/8" X 3/4" CORPORATION STOP
I. PRESSURE REGULATOR SOMETIMES LOCATED NEAR THE RESIDENCE.
J. WATER MAIN

STANDARD DETAIL	DATE: 10/20/2000 REV: 5/10/2017	SERVICE LINE 3/4" AND 1" INSTALLATION FOR RECONNECTION BY CONTRACTOR (EXAMPLE 2) N.T.S.	el paso WATER	DETAIL No. 290-8